
SAVÖX




SV-0258MG

Line	BLACK EDITION
Application	CAR
Servo Size	Low Profile
Operating Voltage	6.0V-7.4V
Speed	0.11 s/60°
Torque	8 kg/cm | 111.1 oz/in
Amplifier Type	Digital Controller
Motor Type	DC Motor
Case Type	Composite
Protection	Dust Resistant
Dimensions (L x W x H)	40.8 x 20.2 x 27.75 mm
Weight	36 g
Gear Type	Hybrid (Metal/Composite)

DIMENSIONS

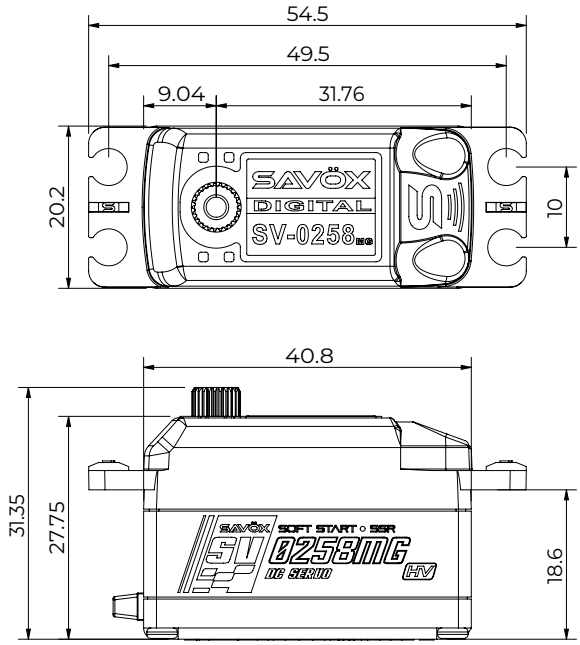

PERFORMANCE RADAR

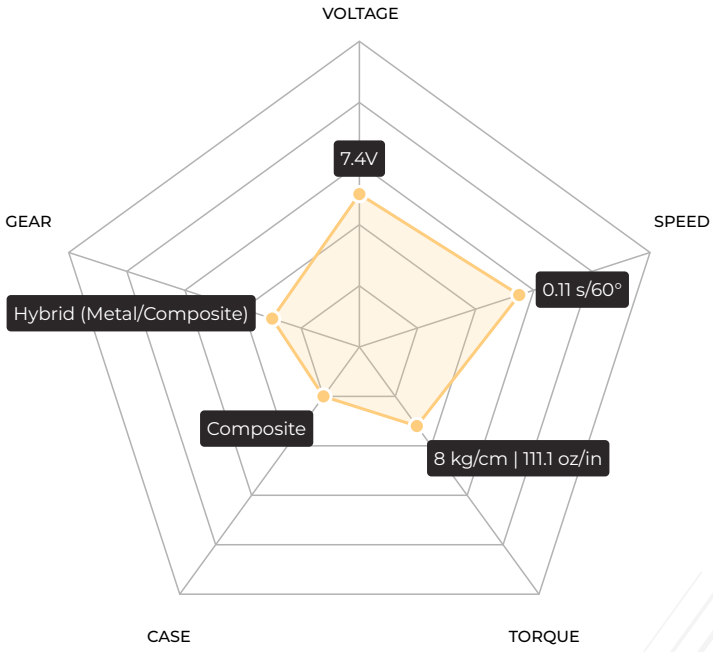

DETAILED SPECIFICATION

Compability	Sanwa SSR	**Potentiometer**	VR
Speed @6.0V	0.13 s/60°	**Cable**	26 AWG 250 ±5 mm
Torque @6.0V	6.5 kg/cm | 90.3 oz/in	**Connector**	JR Connector
Speed @7.4V	0.11 s/60°	**Stall Current @6.0V**	1500 mA
Torque @7.4V	8 kg/cm | 111.1 oz/in	**Operating Current @6.0V**	150 mA
PCB Board	10-bit	**Stall Current @7.4V**	1800 mA
Rotating Direction	Clockwise (when 1000→2000 µsec)	**Operating Current @7.4V**	180 mA
Max Travel	~140° (when 800→2200 µsec)	**Idle Current**	6 mA
Operating Travel	90° (when 1000→2000 µsec)	**Dead Band Width**	3-5 µsec
Neutral Position	1500 µsec	**Frequency Range**	50-360 Hz
Horn Gear Spline	25T(Φ6)	**Control System**	Pulse width modification
Bearing	2x Ball Bearings	**Operating Temperature**	-10°C to 50°C